



FLX 900/...-FME

End-Fed $\frac{1}{2} \lambda$ Dipole Antenna with Universal FME-Connection System for Portable Equipment in the 900 MHz



DESCRIPTION

- Flexible antenna made of steel wire covered with black silicone tubing.
- End-fed $\frac{1}{2} \lambda$ whip – groundplane independent.
- High gain and efficient decoupling from the portable equipment due to half-wave design.
- 3 dB gain (typ.) compared to a $\frac{1}{4} \lambda$ antenna whip on the same equipment.
- Highest quality materials in a long-lasting and durable design.
- Delivered factory tuned to customer specified frequency or cellular system.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procom's line of black FME-connectors (to be ordered separately): BFME-BNC, BFME-TNC, BFME-N, BFME-MUHF, BFME-EBNC, BFME-ETNC and BFME-EMUHF.

SPECIFICATION

Last Update: 07/10/2026 07:09 AM

ELECTRICAL

Model	FLX 900/...-FME
Frequency	900 MHz band (820 – 960 MHz)
Antenna Type	End-fed $\frac{1}{2}$ λ antenna for portable equipment
Max. Input Power	25 W
Polarisation	Vertical
Impedance	50 Ω
Gain	0 dBd / 2.15 dBi (3 dB compared to a $\frac{1}{4}$ λ portable antenna)
VSWR	< 1.3:1 @ f. res.
Bandwidth	≥ 70 MHz @ VSWR ≤ 2.0

MECHANICAL


Connection(s)	FME(f) (Exchangeable BFME-connectors to be ordered separately)
Materials	Silicone tube over flexible steel wire Black-chromed brass
Colour	Black
Historic Brand	Amphenol Procom
Height	Approx. 170 mm / 6.69 in.
Weight	0.025 kg / 0.06 lb.

ORDERING CODES

MODEL	PRODUCT NO.	FREQUENCY
FLX 900/855-FME(f)	140000259	820 – 890 MHz
FLX 900/870-FME(f)	140000260	835 – 905 MHz
FLX 900/925-FME(f)	140000263	890 – 960 MHz
FLX 900/855-SMA(m)	140000264	820 – 890 MHz
FLX 900/870-SMA(m)	140000268	835 – 905 MHz
FLX 900/925-SMA(m)	140000269	890 – 960 MHz


ADDITIONAL INFORMATION

Recommended BFME-Connectors

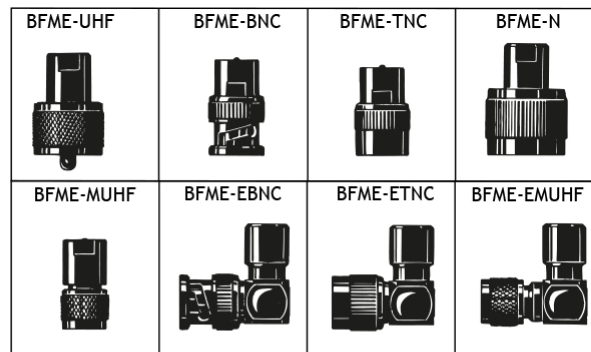

(To be ordered separately)

Typical VSWR curve

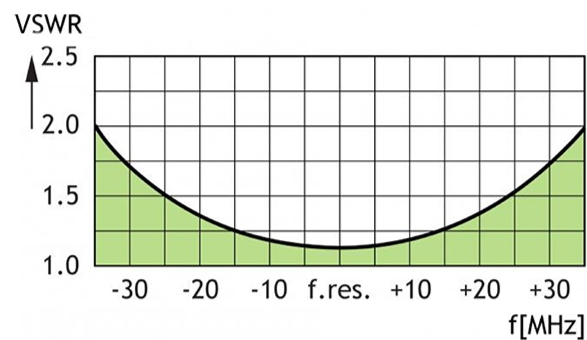

Please Note

The FLX 900 is also available with SMA male connector, but in this case with fixed, non-exchangeable connector (not FME-connection system). Information on this special version on request.